

# SURGiNG

紹 鑫 實 業



## Fuses


保险丝

06D Series

# 06D RoHS Compliant




## 贴片保险丝(快断型) SMD Fuse (Fast-Acting) 32V

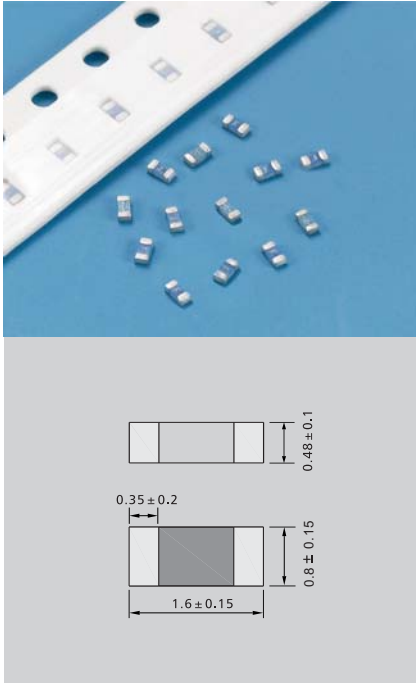

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)
06D0250D	250mA	32V	D	0.00040
06D0375D	375mA	32V	E	0.00087
06D0500D	500mA	32V	F	0.00188
06D0750D	750mA	32V	G	0.00880
06D1100D	1A	32V	H	0.00250
06D1125D	1.25A	32V	J	0.0125
06D1150D	1.5A	32V	K	0.0310
06D1200D	2A	32V	N	0.0480
06D1250D	2.5A	32V	O	0.0615
06D1300D	3A	32V	P	0.0690
06D1350D	3.5A	32V	R	0.1181
06D1400D	4A	32V	S	0.2380
06D1500D	5A	32V	T	0.6817

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	250mA~5A	E221465

**Time-Current Characteristics**  
电流-时间曲线图

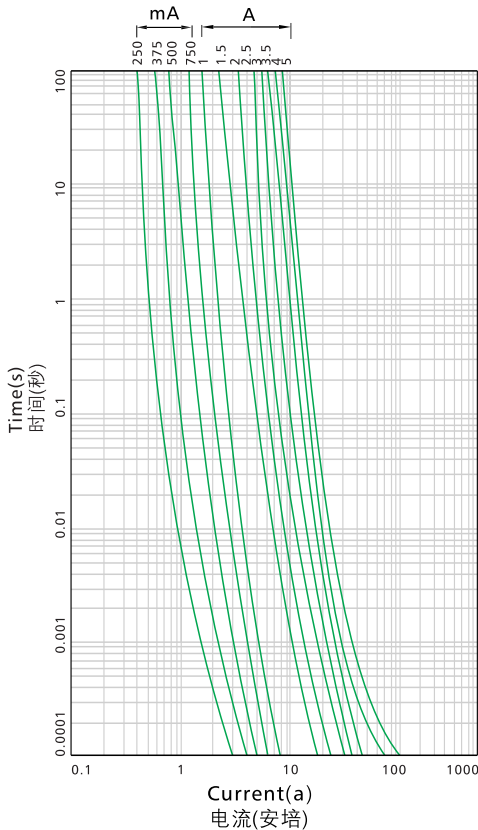

### 额定分断能力

**Interrupting Rating:**  
50 Amperes at 32V DC(250mA-1A)  
35 Amperes at 32V DC(1.25A-5A)

### 电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max(小于60秒)

### 工作温度 Operating Temperature

-55°C ~ +125°C

### 材料 Materials

Substrate: ceramic/glass cover  
Termination: sliver over-plated with nickel and tin  
Element: silver

### 焊接方法 Soldering Method

Solder reflow: 260°C, 10 s max.

### 包装 Packaging

Automaton taped 5000PCS per reel, 50000PCS per carton.