


# 6B $\Phi 6.30 \times 25$ RoHS Compliant



## 英规插头保险丝管 British Plug Top Fuse 240V

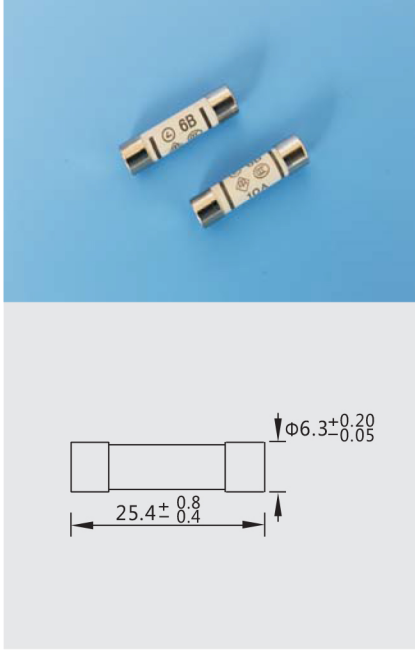

**测试标准:**

**Testing Standard:**  
BS1362 IEC269-3A

**额定分断能力:**

**Interrupting Rating:**  
6000 Amperes at 264 AC


**工作温度:**

**Operating Temperature:**  
-55°C ~ +125°C

**材料:**

**Materials:**  
End cap: nickel plated brass  
Ceramic tube: ceramic  
Brass eye: tin plated brass

**Time-Current Characteristics  
电流-时间曲线图**

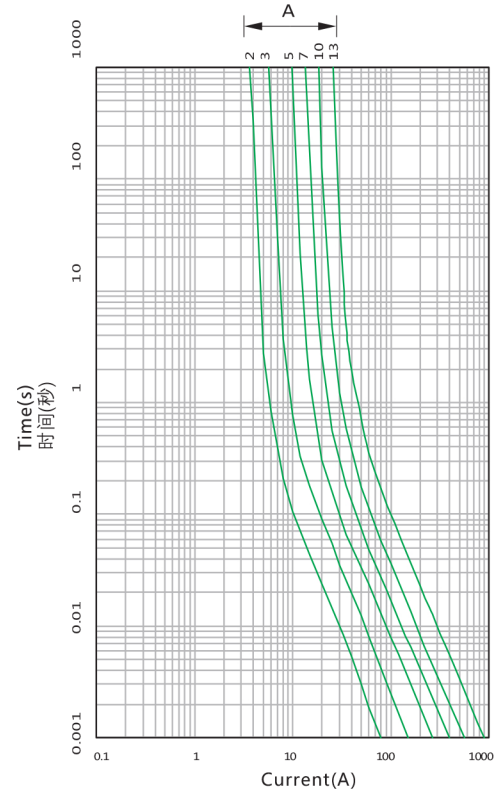

**电气特性: Electrical Characteristics**

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	1000 hours Min(大于1000小时)
160%	30 min Min(大于30分钟)
190%	30 min Max(小于30分钟)

目录编号: Catalog No.S:240V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大功耗 Max Power Dissipation	熔化热能 <sup>2</sup> Melting Integral (A <sup>2</sup> .S)	认证 Approvals	
					CCC	AFA
6B1200S	2A	240V	1Watt	9.0	●	●
6B1300S	3A	240V	1Watt	29.9	●	●
6B1500S	5A	240V	1Watt	78.7	●	●
6B1700S	7A	240V	1Watt	160	●	●
6B2100S	10A	240V	1Watt	328	●	●
6B2130S	13A	240V	1Watt	765	●	●

● 表示已获认证  
● 表示认证中