




6Q $\Phi 6.35 \times 30$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

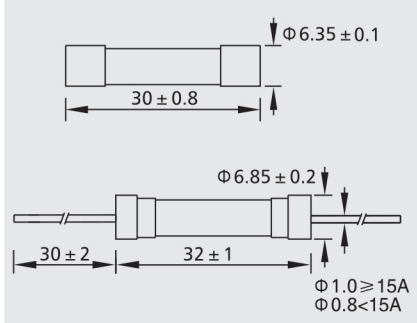


测试标准:
Testing Standard:
METI Ordinance Article 1

额定分断能力:
Interrupting Rating:
500 Amperes at 125V AC
100 Amperes at 250V AC

工作温度:
Operating Temperature:
 $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

材料:
Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass

焊接方法:
Soldering Method:
Wave soldering: 260°C , 10s max
Manual soldering: 350°C , 5s max

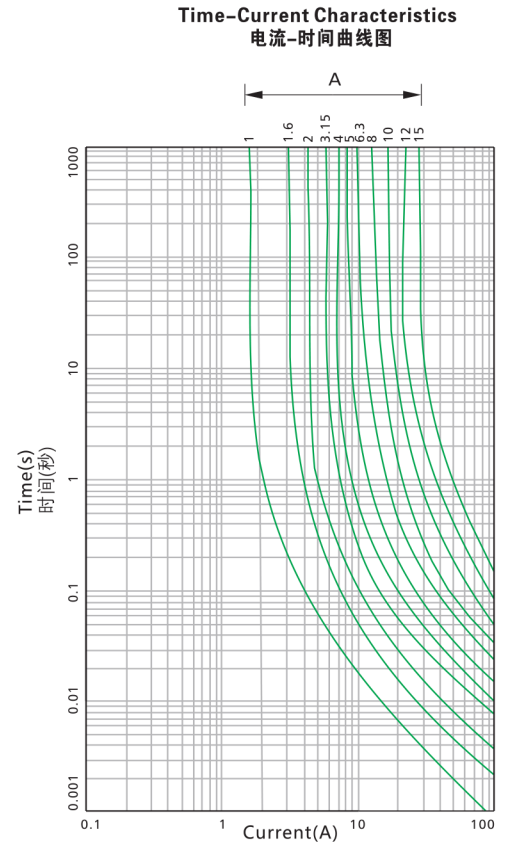

电气特性: Electrical Characteristics

额定电流的 % of Ampere Rating	熔断时间 Opening Time
130%	1 hours Min(大于1小时)
160%	1 hour Max(小于1小时)
200%	120 s Max (小于120秒)
1000%	10 ms Min(大于10毫秒)

目录编号: Catalog No. A:250V B:125V 带引线产品目录编号后加"P":Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ¹ Melting Integral (A ² .S)	认证 Approvals
6Q1100A/B	1A	250V/125V	2.5	●
6Q1125A/B	1.25A	250V/125V	5.6	●
6Q1150A/B	1.5A	250V/125V	14	●
6Q1160A/B	1.6A	250V/125V	18	●
6Q1200A/B	2A	250V/125V	20	●
6Q1250A/B	2.5A	250V/125V	31	●
6Q1300A/B	3A	250V/125V	39	●
6Q1315A/B	3.15A	250V/125V	78	●
6Q1400A/B	4A	250V/125V	112	●
6Q1500A/B	5A	250V/125V	139	●
6Q1600A/B	6A	250V/125V	183	●
6Q1630A/B	6.3A	250V/125V	204	●
6Q1800A/B	8A	250V/125V	758	●
6Q2100A/B	10A	250V/125V	830	●
6Q2120A/B	12A	250V/125V	1005	●
6Q2150A/B	15A	250V/125V	1480	●

认证 Approvals ● 表示已获认证
● 表示认证中