


6D $\Phi 6.35 \times 32$ RoHS Compliant



玻璃保险丝管(快断型)

Glass Tube Fuse (Fast-Acting) 250V/125V

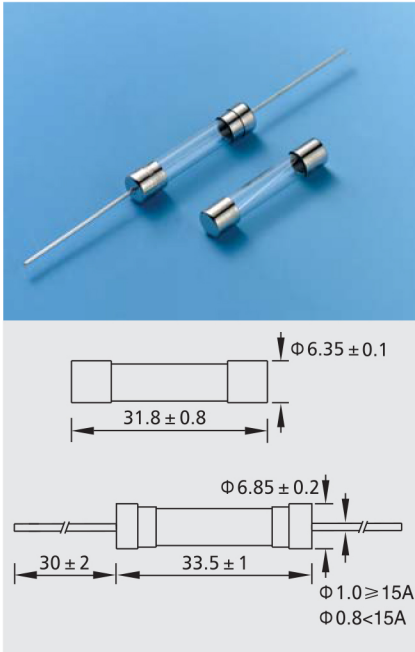

测试标准:
Testing Standard:
 UL248-1 UL248-14


额定分断能力:
Interrupting Rating:
 10000 Amperes at 125V AC
 35 Amperes at 250V AC(100mA~1A)
 100 Amperes at 250V AV(1.25A~3.5A)
 200 Amperes at 250V AC(4A~10A)

工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 End cap:nickel plated brass
 Glass tube:glass
 Lead wire:tinned copper wire
 Inner cap:nickel plated brass

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 350°C, 5s max

Time-Current Characteristics
 电流-时间曲线图

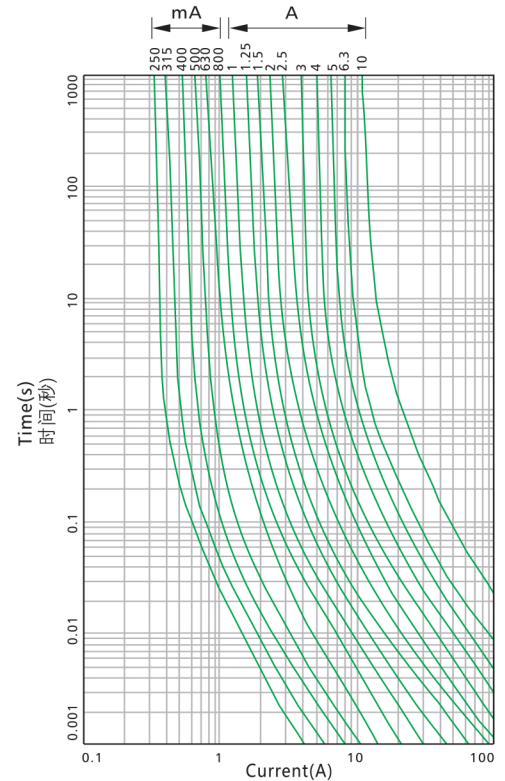

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	5 s Max (小于5秒)

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals		
				UL	UL	KC
6D0160A/B	160mA	250V/125V	0.008	●	●	
6D0200A/B	200mA	250V/125V	0.020	●	●	
6D0250A/B	250mA	250V/125V	0.026	●	●	
6D0315A/B	315mA	250V/125V	0.055	●	●	
6D0400A/B	400mA	250V/125V	0.10	●	●	
6D0500A/B	500mA	250V/125V	0.16	●	●	
6D0630A/B	630mA	250V/125V	0.28	●	●	
6D0750A/B	750mA	250V/125V	0.49	●	●	
6D0800A/B	800mA	250V/125V	0.6	●	●	
6D1100A/B	1A	250V/125V	0.8	●	●	●
6D1125A/B	1.25A	250V/125V	1.6	●	●	
6D1150A/B	1.5A	250V/125V	2.5	●	●	
6D1160A/B	1.6A	250V/125V	3.2	●	●	
6D1200A/B	2A	250V/125V	5.6	●	●	●
6D1250A/B	2.5A	250V/125V	7.6	●	●	
6D1300A/B	3A	250V/125V	14	●	●	●
6D1315A/B	3.15A	250V/125V	19	●	●	
6D1350A/B	3.5A	250V/125V	20	●	●	
6D1400A/B	4A	250V/125V	25	●	●	●
6D1500A/B	5A	250V/125V	42	●	●	●
6D1600A/B	6A	250V/125V	80	●	●	
6D1630A/B	6.3A	250V/125V	96	●	●	
6D1800A/B	8A	250V/125V	200	●	●	
6D2100A/B	10A	250V/125V	320	●	●	●

● 表示已获认证
 ● 表示认证中