




6E $\Phi 6.35 \times 32$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

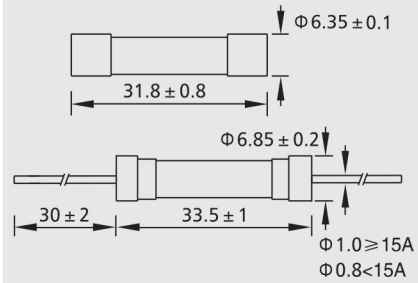

测试标准:

Testing Standard:
UL248-1 UL248-14

额定分断能力:

Interrupting Rating:
10000 Amperes at 125V AC(100mA~10A)
35 Amperes at 250V AC(100mA~1A)
100 Amperes at 250V AC(1.25A~3.5A)
200 Amperes at 250V AC(4A~10A)
150 Amperes at 125V/250V AC(12A~30A)

工作温度:

Operating Temperature:
 $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

材料:

Materials:
End cap:nickel plated brass
Glass tube:glass
Lead wire:tinned copper wire
Inner cap:nickel plated brass


焊接方法:

Soldering Method:
Wave soldering: 260°C , 10s max
Manual soldering: 350°C , 5s max

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	120 s Max(小于120秒)
1000%	10 ms Min(大于10毫秒)

Time-Current Characteristics 电流-时间曲线图

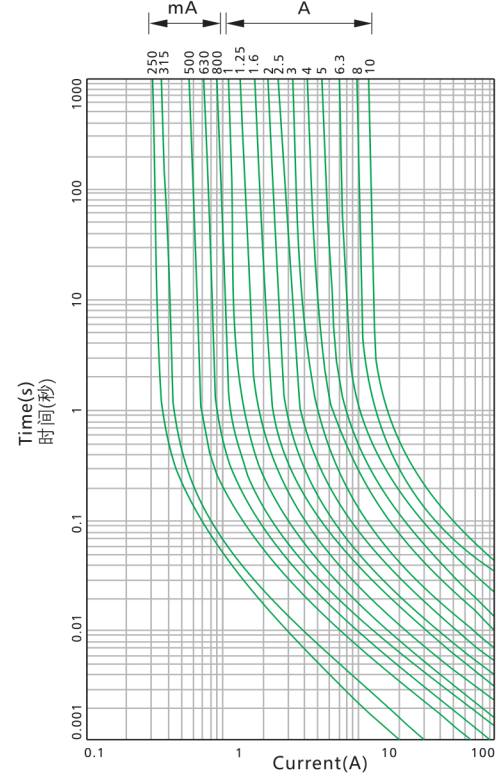

目录编号: Catalog No.A:250V B:125V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)	认证 Approvals		
6E0160A/B	160mA	250V/125V	0.075	●	●	
6E0200A/B	200mA	250V/125V	0.12	●	●	
6E0250A/B	250mA	250V/125V	0.15	●	●	
6E0315A/B	315mA	250V/125V	0.22	●	●	
6E0500A/B	500mA	250V/125V	0.52	●	●	
6E0630A/B	630mA	250V/125V	0.87	●	●	
6E0800A/B	800mA	250V/125V	1.4	●	●	
6E1100A/B	1A	250V/125V	3.5	●	●	
6E1125A/B	1.25A	250V/125V	7.6	●	●	
6E1150A/B	1.5A	250V/125V	9.1	●	●	
6E1160A/B	1.6A	250V/125V	13	●	●	
6E1200A/B	2A	250V/125V	20	●	●	
6E1250A/B	2.5A	250V/125V	39	●	●	
6E1300A/B	3A	250V/125V	61	●	●	
6E1315A/B	3.15A	250V/125V	56	●	●	
6E1350A/B	3.5A	250V/125V	70	●	●	
6E1400A/B	4A	250V/125V	104	●	●	
6E1500A/B	5A	250V/125V	148	●	●	
6E1600A/B	6A	250V/125V	173	●	●	
6E1630A/B	6.3A	250V/125V	192	●	●	
6E1800A/B	8A	250V/125V	380	●	●	
6E2100A/B	10A	250V/125V	580	●	●	
6E2120A/B	12A	250V/125V	750			●
6E2150A/B	15A	250V/125V	910			●
6E2200A/B	20A	250V/125V	1250			●
6E2250A/B	25A	250V/125V	1510			●
6E2300A/B	30A	250V/125V	1900			●

● 表示已获认证
● 表示认证中