


5K $\Phi 5.2 \times 20$ RoHS Compliant



玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V

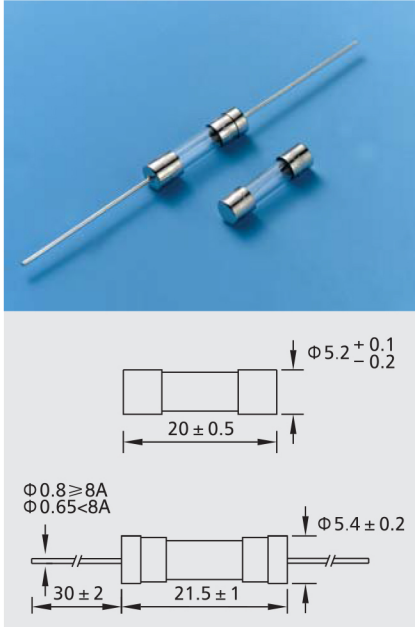

测试标准:
Testing Standard:
 IEC60127-1 IEC60127-2 GB9364.1 GB9364.2


额定分断能力:
Interrupting Rating:
 35A or 10In Whichever is greater

工作温度:
Operating Temperature:
 -55°C ~ +125°C

材料:
Materials:
 End cap:nickel plated brass
 Glass tube:glass
 Lead wire:tinned copper wire
 Inner cap:nickel plated brass

焊接方法:
Soldering Method:
 Wave soldering: 260°C, 10s max
 Manual soldering: 350°C, 5s max

Time-Current Characteristics
 电流-时间曲线图

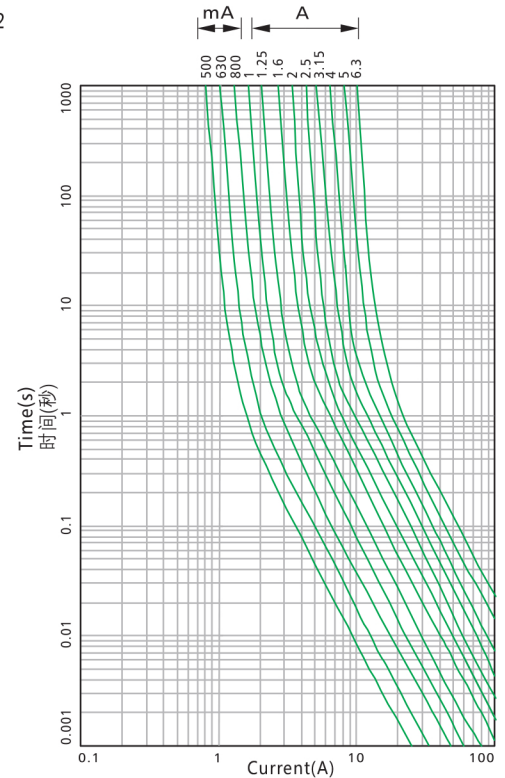

电气特性: Electrical Characteristics

| 额定电流的% % of Ampere Rating | 熔断时间 Opening Time (200mA~10A) | 熔断时间 Opening Time (12.5A~16A) |
|------------------------------|----------------------------------|----------------------------------|
| 210% | 2 min Max(小于2分钟) | 5 min Max(小于5分钟) |
| 275% | 600 ms~10 s | 600 ms~15 s |
| 400% | 150 ms~3 s | 150 ms~5 s |
| 1000% | 20 ms~300 ms | 20 ms~400 ms |

目录编号: Catalog No.A:250V 带引线产品目录编号后加"P":Suffix"P"for Lead Type After Catalog No.

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | 最大电压降(mv) Max Voltage Drop | 熔化热能 ¹ _T Melting Integral (A ² .S) | 认证 Approvals | | | | | | | |
|---------------------|-----------------------|------------------------|-------------------------------|--|--------------|-----|-------|-----|----------|----|---|--|
| | | | | | UL US | DVE | CCC S | CEC | PS E JET | KC | S | |
| 5K0200A | 200mA | 250V | 1500 | 0.10 | ● | | | | | | | |
| 5K0250A | 250mA | 250V | 1300 | 0.18 | ● | | | | | | | |
| 5K0315A | 315mA | 250V | 1100 | 0.30 | ● | ● | ● | | | ● | ● | |
| 5K0400A | 400mA | 250V | 1000 | 0.65 | ● | | | | | | | |
| 5K0500A | 500mA | 250V | 900 | 0.96 | ● | ● | ● | | | ● | ● | |
| 5K0630A | 630mA | 250V | 300 | 1.7 | ● | ● | ● | | | ● | ● | |
| 5K0800A | 800mA | 250V | 250 | 3.2 | ● | ● | ● | | | ● | ● | |
| 5K1100A | 1A | 250V | 150 | 3.8 | ● | ● | ● | | | ● | ● | |
| 5K1125A | 1.25A | 250V | 150 | 4.3 | ● | ● | ● | | ● | ● | ● | |
| 5K1160A | 1.6A | 250V | 150 | 5.0 | ● | ● | ● | | ● | ● | ● | |
| 5K1200A | 2A | 250V | 150 | 12.8 | ● | ● | ● | | ● | ● | ● | |
| 5K1250A | 2.5A | 250V | 100 | 20.7 | ● | ● | ● | | ● | ● | ● | |
| 5K1315A | 3.15A | 250V | 100 | 45 | ● | ● | ● | | ● | ● | ● | |
| 5K1400A | 4A | 250V | 100 | 61.4 | ● | ● | ● | | ● | ● | ● | |
| 5K1500A | 5A | 250V | 100 | 135 | ● | ● | ● | | ● | ● | ● | |
| 5K1630A | 6.3A | 250V | 100 | 205 | ● | ● | ● | | ● | ● | ● | |
| 5K1800A | 8A | 250V | 100 | 320 | ● | ● | ● | ● | ● | ● | ● | |
| 5K2100A | 10A | 250V | 100 | 510 | ● | ● | ● | ● | ● | ● | ● | |
| 5K2125A | 12.5A | 250V | 80 | 800 | ● | | ● | ● | ● | ● | ● | |
| 5K2160A | 16A | 250V | 80 | 1105 | ● | | ● | ● | ● | ● | ● | |